


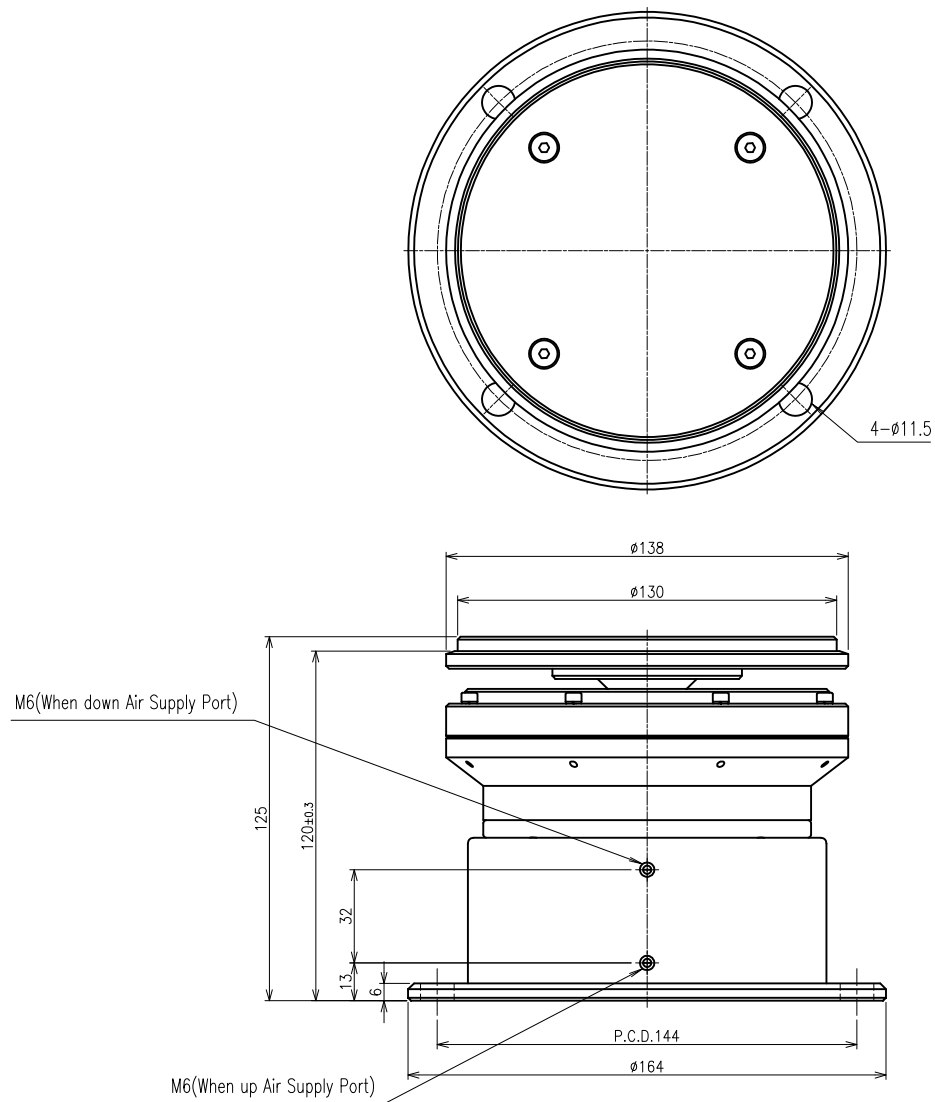

>Description
 ILS Type Positioning Stage
 ILS-350-H10 Type
 Unit = mm

>Positioning unit specification
 Product Weight = 4.1kg
 Load capacity : 350kgf Max
 Horizontal Stroke : ±20mm[0.787"]
 Vertical Stroke : 10mm[0.394"]

Lifting Capability
 0.4MPa: 314kgf
 0.5MPa: 392kgf
 0.6MPa: 417kgf

Case = Aluminum+Alumite
 Fixing flange = Aluminum+Alumite
 Moving stage = SUS304+UHMWPE

(CAUTION) when returning back the moving plate back to its original position no load should applied on the moving plate
 Air specifications

- With stand pressure : 0.7MPa(7.14kgf/cm²)
- Recommended air pressure : 0.4~0.6MPa (4.08~6.12kgf/cm²)
- Operating temperature limit : 10℃~60℃
- Operating fluid : air or oil free inactive gas