


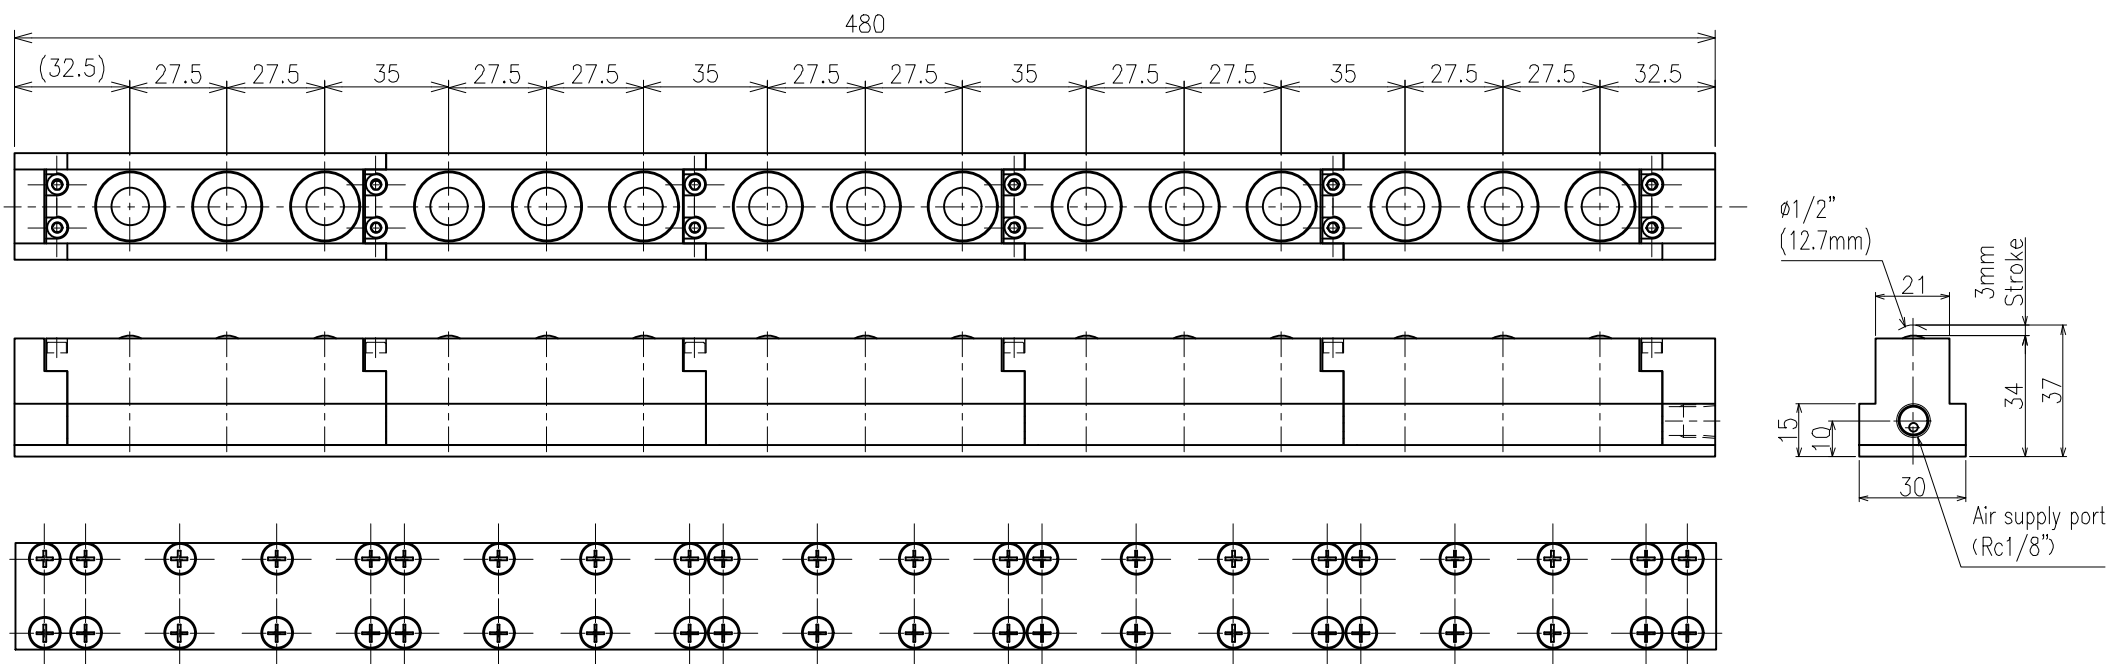

Load capacity on each ball

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	171.5N {17.5kgf}	216.6N {22.1kgf}	259.7N {26.5kgf}

Load capacity on each unit

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	2.5kN {262.5kgf}	3.2kN {331.5kgf}	3.9kN {397.5kgf}

>Description
ISR-T Type Air Ball Lifter
ISR-22T-480 Type
Unit = mm

>Specification
Product weight = 1.75kg

Withstand pressure = 0.9MPa (9.18kgf/cm²)

Working pressure range = 0.05~0.6MPa

(0.51~6.12kgf/cm²)

Operating temperature range = -5~80°C

(without freezing air line)

Using fluid = Air and inert gas (no filling up)

>Material
Ball = SUJ2
Cover = S45C
Body = A6063
Plug = A6063
Bar = SPC