


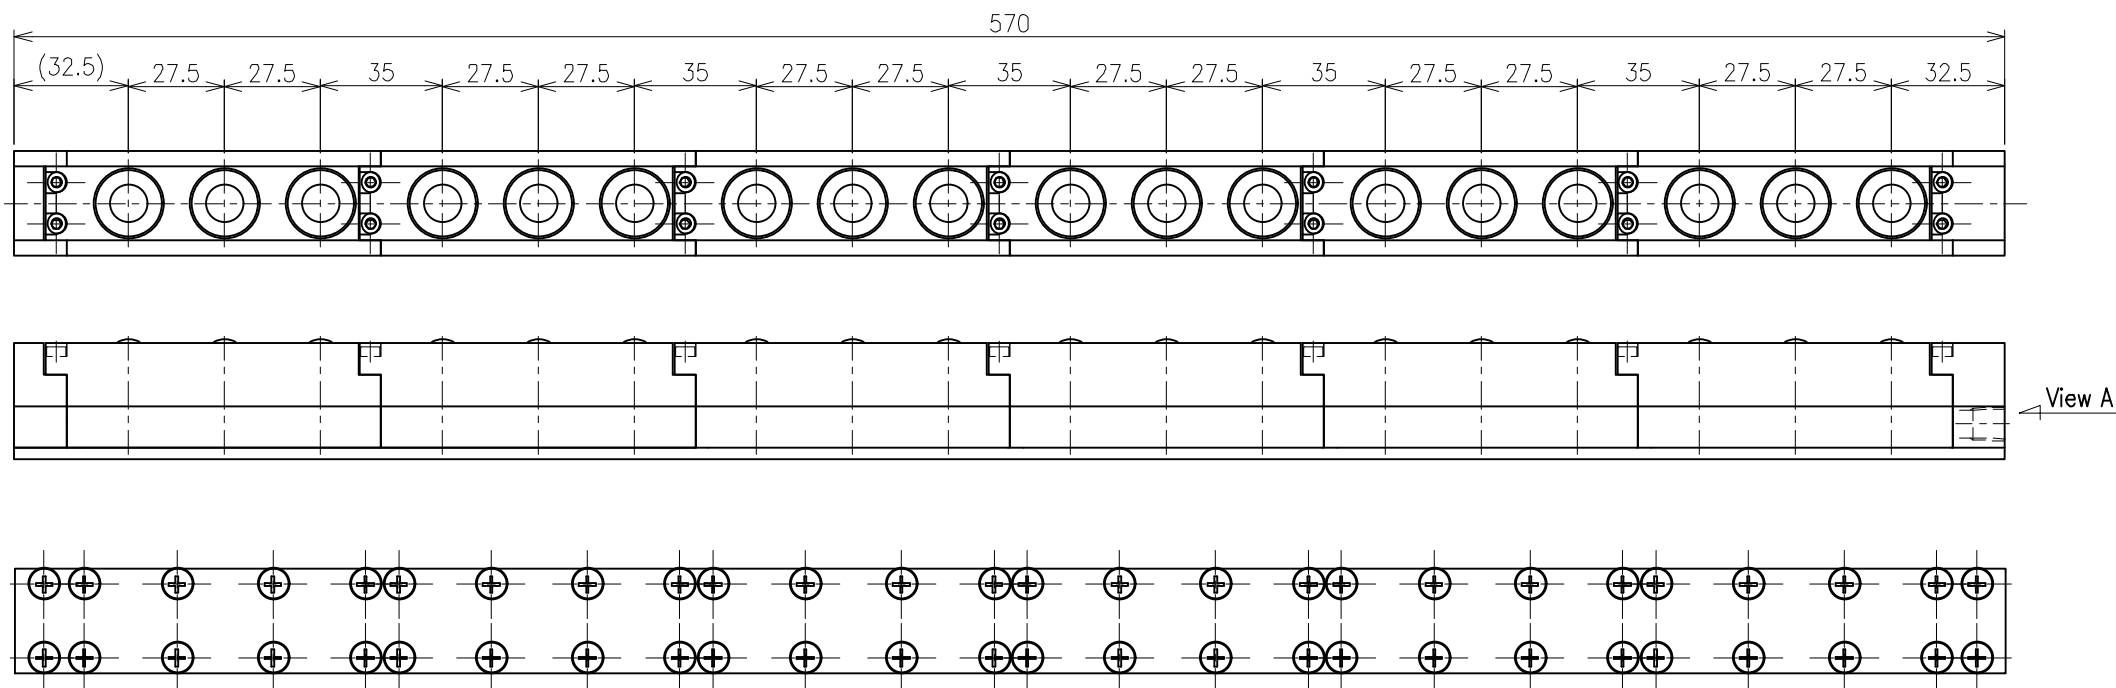

Load capacity on each ball

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	171.5N {17.5kgf}	216.6N {22.1kgf}	259.7N {26.5kgf}

Load capacity on each unit

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	3.1kN {315.0kgf}	3.9kN {397.8kgf}	4.7kN {477.0kgf}

>Description
 ISR-T Type Air Ball Lifter
 ISR-22T-570 Type
 Unit = mm

>Specification
 Product wight = 2.1kg
 Withstand pressure = 0.9MPa (9.18kgf/cm²)
 Working pressure range = 0.05~0.6MPa
 (0.51~6.12kgf/cm²)
 Operating tempreture range = -5~80°C
 (without freezig air line)
 Using fluid = Air and inert gas (no filling up)

>Material
 Ball = SUJ2
 Cover = S45C
 Body = A6063
 Plug = A6063
 Bar = SPC

