


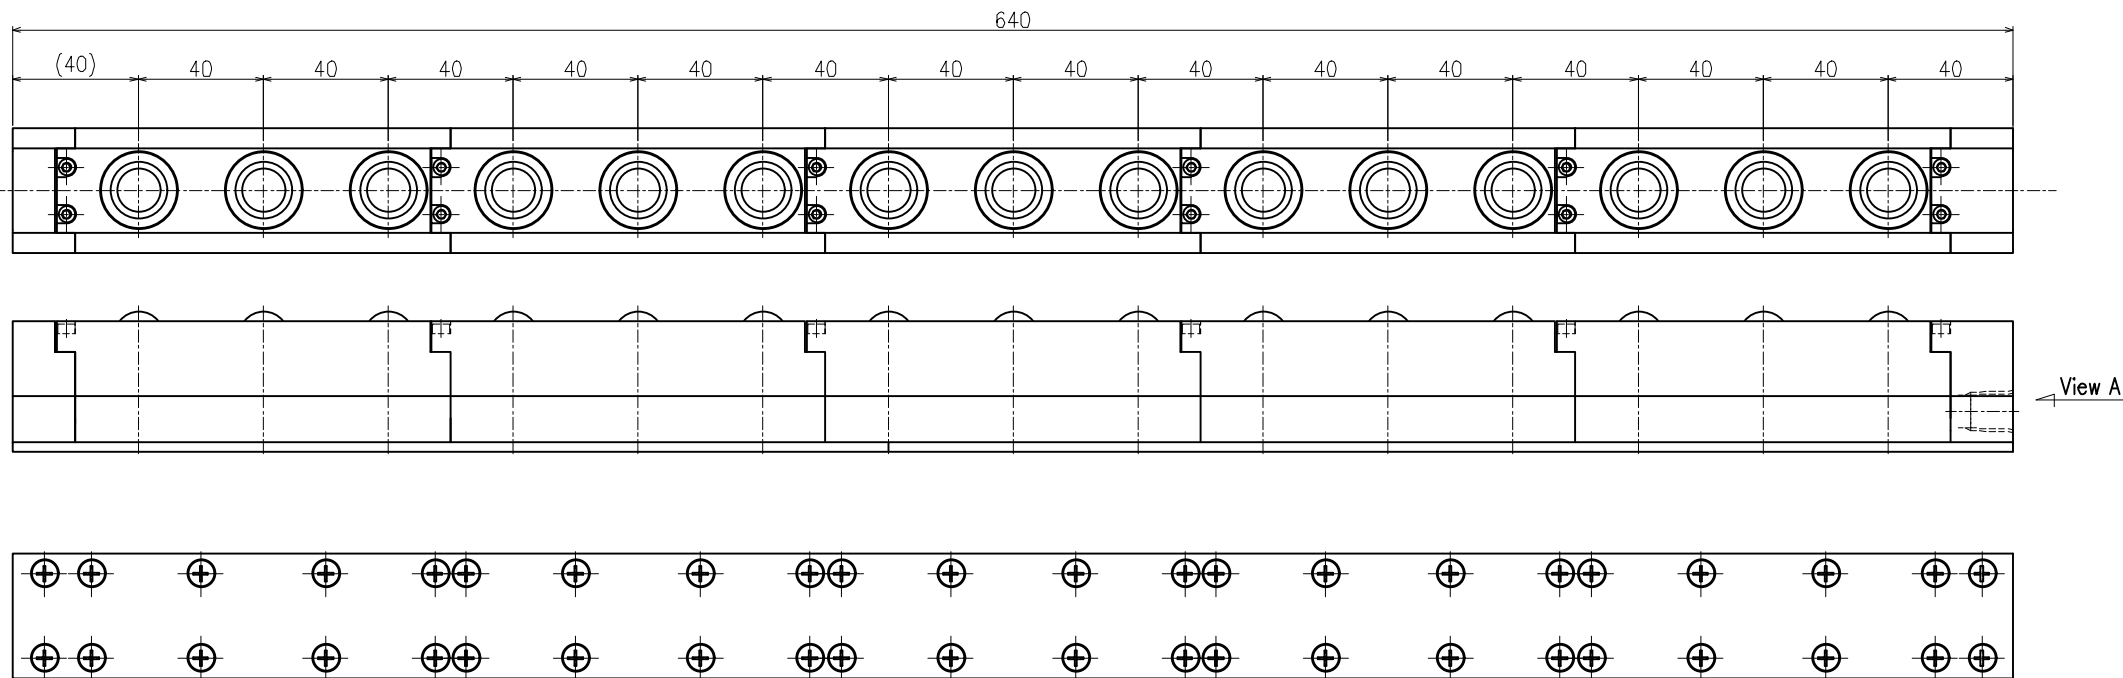

Load capacity on each ball

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	254.8N {26.0kgf}	323.4N {33.0kgf}	392.0N {40.0kgf}

Load capacity on each unit

Supplied air pressure	0.4MPa {4.08kgf/cm ² }	0.5MPa {5.10kgf/cm ² }	0.6MPa {6.12kgf/cm ² }
Load capacity	3.8kN {390.0kgf}	4.8kN {495.0kgf}	5.8kN {600.0kgf}

>Description
ISR-T Type Air Ball Lifter
ISR-28T-640 Type
Unit = mm

>Specification
Product wight = 3.2kg
Withstand pressure = 0.9MPa (9.18kgf/cm²)
Working pressure range = 0.05~0.6MPa
(0.51~6.12kgf/cm²)
Operating tempreture range = -5~80°C
(without freezig air line)
Using fluid = Air and inert gas (no filling up)

>Material
Ball = SUJ2
Cover = SUM
Body = A6063
Plug = A6063
Bar = SPC

