


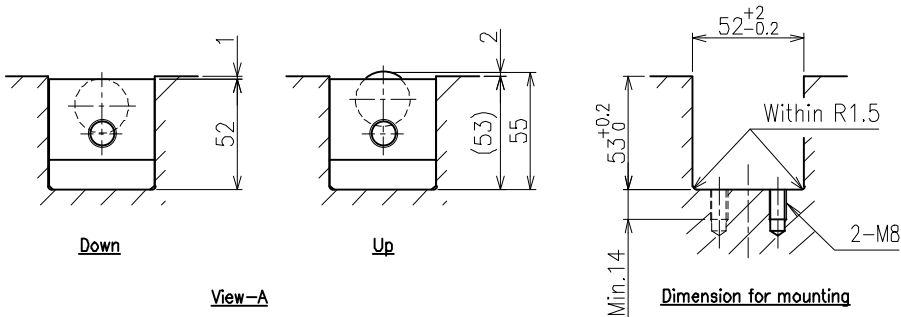

Load capacity			
No. of balls	12		
Supplied air pressure	0.4MPa	0.5MPa	0.6MPa
	{4.08kgf/cm ² }	{5.10kgf/cm ² }	{6.12kgf/cm ² }
Load capacity on each ball	0.98kN	1.24kN	1.51kN
	{100kgf}	{127kgf}	{154kgf}
Load capacity on each unit	11.80kN	14.90kN	18.10kN
	{1200kgf}	{1524kgf}	{1848kgf}

>Material
 Ball = SUS44C
 Plate = SUS440C
 Cap = SUS304
 O-ring = Viton
 Grease = Clean Grease
 Body = A6063-T5
 +Electroless Nickel plating
 Plug = A6063-T5
 +Electroless Nickel plating
 Bar = SGD400-D
 +Electroless Nickel plating