


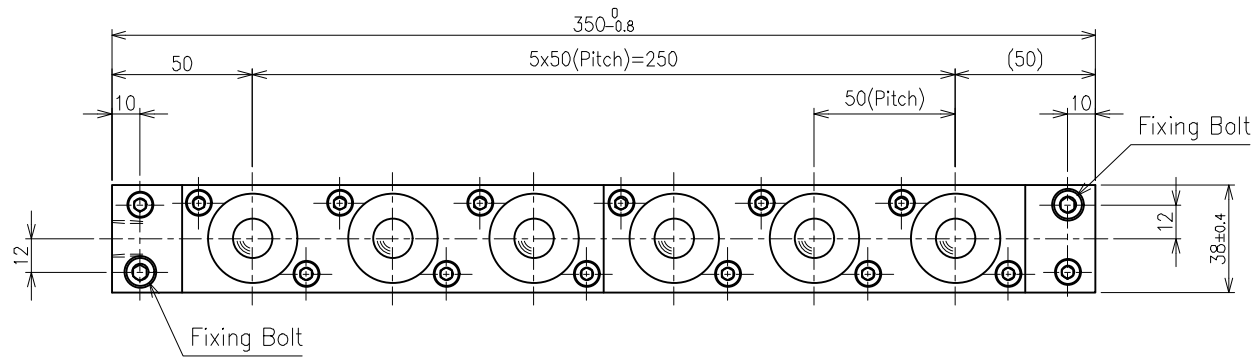




Load capacity			
No. of balls	6		
Supplied air pressure	0.4MPa	0.5MPa	0.6MPa
	{4.08kgf/cm ² }	{5.10kgf/cm ² }	{6.12kgf/cm ² }
Load capacity on each ball	0.32kN	0.41kN	0.51kN
	{33kgf}	{42kgf}	{52kgf}
Load capacity on each unit	1.94kN	2.47kN	3.06kN
	{198kgf}	{252kgf}	{312kgf}

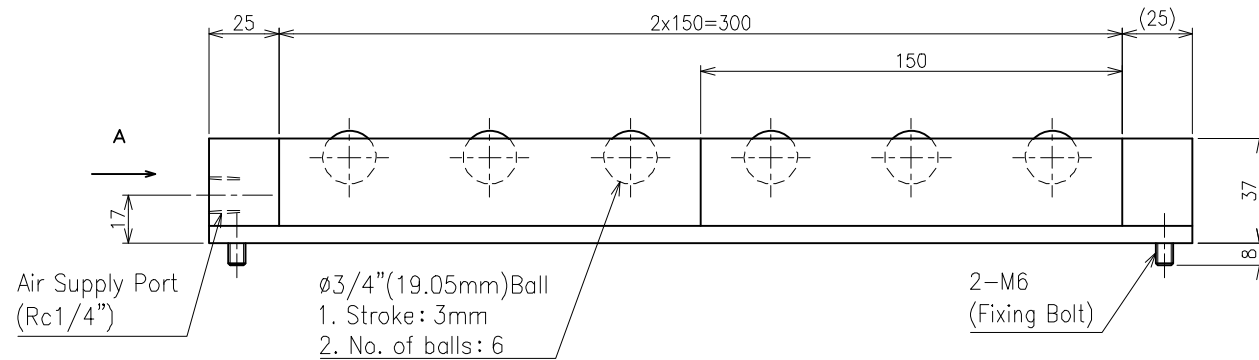


Down



Up

View-A



Dimension for mounting

>Description
ISR38 Type Air Ball Lifter
ISR38-350-A Type
Unit = mm

>Specification
Product weight = 2.0kg
Withstand pressure = 0.9MPa (9.18kgf/cm²)
Working pressure range = 0.05~0.6MPa

(0.51~6.12kgf/cm²)

Operating temperature range = -5~80°C
(without freezign air line)

Using fluid = Air and inert gas (no filling up)

>Material
Ball = SUJ2
Plate = SUJ2
Cap = POM
O-ring = NBR
Grease = Normal Grease
Body = A6063-T5
Plug = A6063-T5
Bar = SGD400-D