
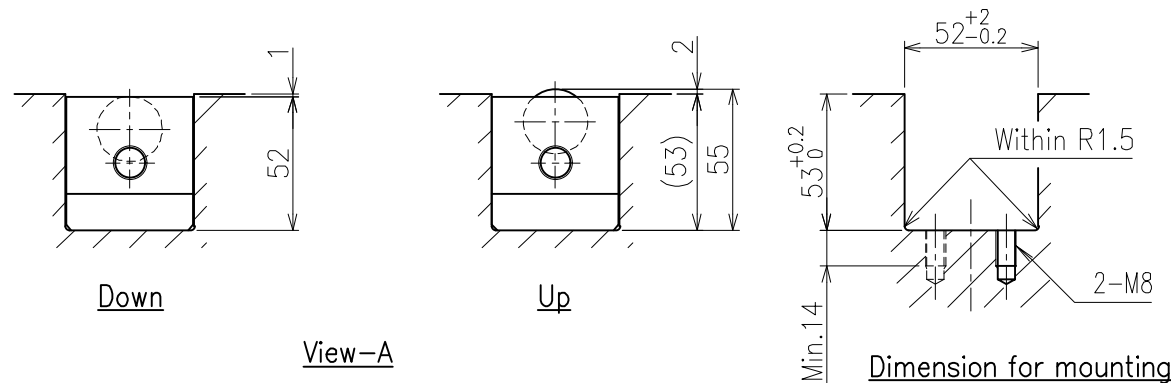


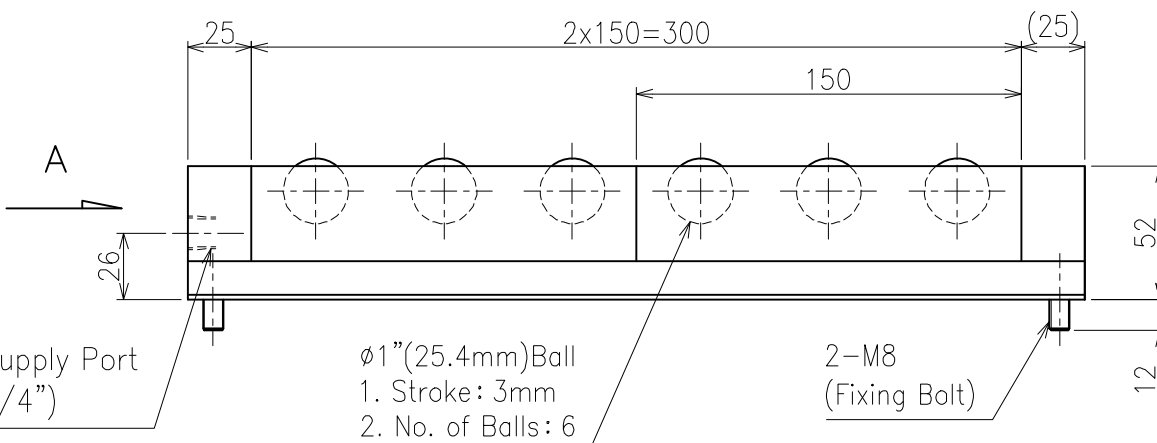

Load capacity			
No. of balls	6		
Supplied air pressure	0.4MPa	0.5MPa	0.6MPa
	{4.08kgf/cm ² }	{5.10kgf/cm ² }	{6.12kgf/cm ² }
Load capacity on each ball	0.98kN	1.24kN	1.51kN
	{100kgf}	{127kgf}	{154kgf}
Load capacity on each unit	5.88kN	7.47kN	9.06kN
	{600kgf}	{762kgf}	{924kgf}

>Description
ISR50D Type Air Ball Lifter
ISR50D-350-A Type
Unit = mm

>Specification
 Product weight = 2.8kg
 Withstand pressure = 0.9MPa (9.18kgf/cm²)
 Working pressure range = 0.05~0.6MPa
 (0.51~6.12kgf/cm²)
 Operating temperature range = -5~80°C
 (without freezng air line)
 Using fluid = Air and inert gas (no filling up)

```
>Material
Ball = SUJ2
Plate = SUJ2
Cap = POM
O-ring = NBR
Grease = Normal Grease
Body = A6063-T5
Plug = A6063-T5
Bar = A6063-T5
```